

# Klübersynth LI 44-22

Synthetic low-temperature grease with good damping properties



## Benefits for your application

- **Synthetic low-temperature grease with good damping properties**
- **Almost neutral towards many plastics**
- **Low friction coefficients**
- **Resistant to ageing**
- **Approved acc. to VW-TL 778 B and Ford WSD-M1C234-A2**

## Description

Klübersynth LI 44-22 is a fully synthetic, dynamically light low-temperature grease with good damping and adhesion properties as well as water resistance. It is based on synthetic hydrocarbons, lithium soap, antifriction solid lubricants as well as corrosion and oxidation inhibitors. Klübersynth LI 44-22 is almost neutral towards many plastics and elastomers.

pairings. The product is approved according to the specifications VW-TL 778 B and Ford WSD-M1C234-A2.

## Application notes

Apply Klübersynth LI 44-22 by brush or spatula, or with conventional metering systems.

## Application

Due to its excellent low-temperature and damping characteristics Klübersynth LI 44-22 is used in the precision engineering and auto-motive industry, e.g. for automatic locking systems, seat adjustment systems and small gears. Klübersynth LI 44-22 is particularly suitable for plastic/plastic and steel/ plastic material

## Material safety data sheets


Material safety data sheets can be requested via our website [www.klueber.com](http://www.klueber.com). You may also obtain them through your contact person at Klüber Lubrication.

Pack sizes	Klübersynth LI 44-22
Can 1 kg	+
Bucket 25 kg	+
Bucket 50 kg	-

# Klübersynth LI 44-22

Synthetic low-temperature grease with good damping properties

Product data	Klübersynth LI 44-22
Article number	004223
Lower service temperature	-60 °C / -76 °F
Upper service temperature	130 °C / 266 °F
Colour space	beige
Texture	homogeneous
Texture	short-fibred
Density at 20 °C	approx. 0.9 g/cm <sup>3</sup>
NLGI grade, DIN 51818	2
Worked penetration, DIN ISO 2137, 25 °C, lower limit value	265 x 0.1 mm
Worked penetration, DIN ISO 2137, 25 °C, upper limit value	295 x 0.1 mm
Shear viscosity at 25 °C, shear rate 300 s <sup>-1</sup> , equipment: rotational viscometer, lower limit value	2 500 mPas
Shear viscosity at 25 °C, shear rate 300 s <sup>-1</sup> , equipment: rotational viscometer, upper limit value	5 500 mPas
Kinematic viscosity of the base oil, DIN 51562 pt. 01/ASTM D-445/ASTM D 7042, 40 °C	approx. 18 mm <sup>2</sup> /s
Kinematic viscosity, DIN 51562 pt. 01/ASTM D-445/ASTM D 7042, 100 °C	approx. 4 mm <sup>2</sup> /s
Corrosion inhibiting properties of lubricating greases, DIN 51802, (SKF-EMCOR), test duration: 1 week, distilled water	<= 1 corrosion degree
Copper corrosion, DIN 51811, (lubricating grease), 24h/100°C	1 - 100 corrosion degree
Drop point, DIN ISO 2176	>= 180 °C
Flow pressure of lubricating greases, DIN 51805, test temperature: -35 °C	<= 450 mbar
Flow pressure of lubricating greases, DIN 51805, test temperature: -60 °C	<= 1 400 mbar
Oxidation stability of lubricating greases, ASTM D942, 100 h/99 °C, pressure drop	<= 0.3 bar
Water resistance, DIN 51807 pt. 01, 3 h/90 °C, rating	<= 1 - 90
Minimum shelf life from the date of manufacture - in a dry, frost-free place and in the unopened original container, approx.	24 months

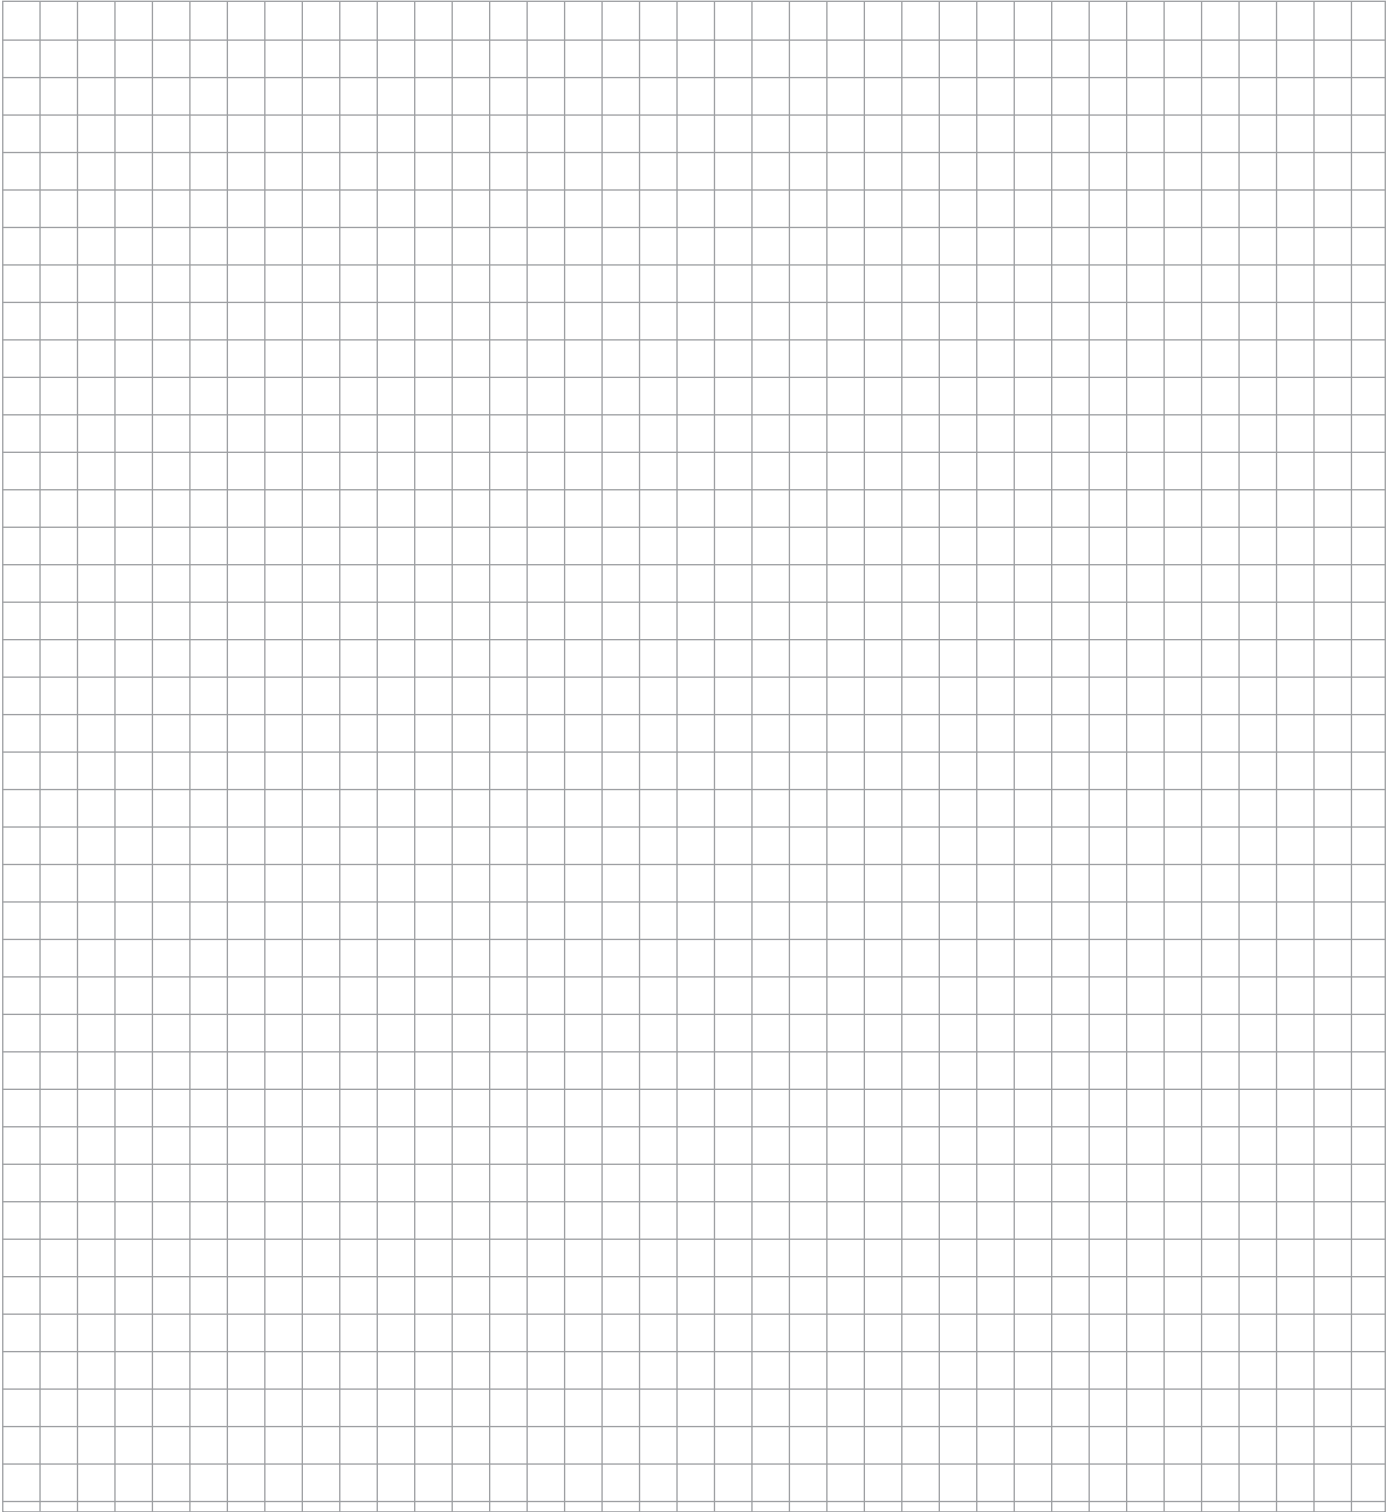



## Klübersynth LI 44-22

Synthetic low-temperature grease with good damping properties



### **Klüber Lubrication – your global specialist**

Innovative tribological solutions are our passion. Through personal contact and consultation, we help our customers to be successful worldwide, in all industries and markets. With our ambitious technical concepts and experienced, competent staff we have been fulfilling increasingly demanding requirements by manufacturing efficient high-performance lubricants for more than 80 years.

**Klüber Lubrication München SE & Co. KG /  
Geisenhausenerstraße 7 / 81379 München / Germany /  
phone +49 89 7876-0 / fax +49 89 7876-333.**

The data in this document is based on our general experience and knowledge at the time of publication and is intended to give information of possible applications to a reader with technical experience. It constitutes neither an assurance of product properties nor does it release the user from the obligation of performing preliminary field tests with the product selected for a specific application. All data are guide values which depend on the lubricant's composition, the intended use and the application method. The technical values of lubricants change depending on the mechanical, dynamical, chemical and thermal loads, time and pressure. These changes may affect the function of a component. We recommend contacting us to discuss your specific application. If possible we will be pleased to provide a sample for testing on request. Klüber products are continually improved. Therefore, Klüber Lubrication reserves the right to change all the technical data in this document at any time without notice.

Publisher and Copyright: Klüber Lubrication München SE & Co. KG. Reprints, total or in part, are permitted only prior consultation with Klüber Lubrication München SE & Co. KG and if source is indicated and voucher copy is forwarded.



a company of the Freudenberg Group